



top of head

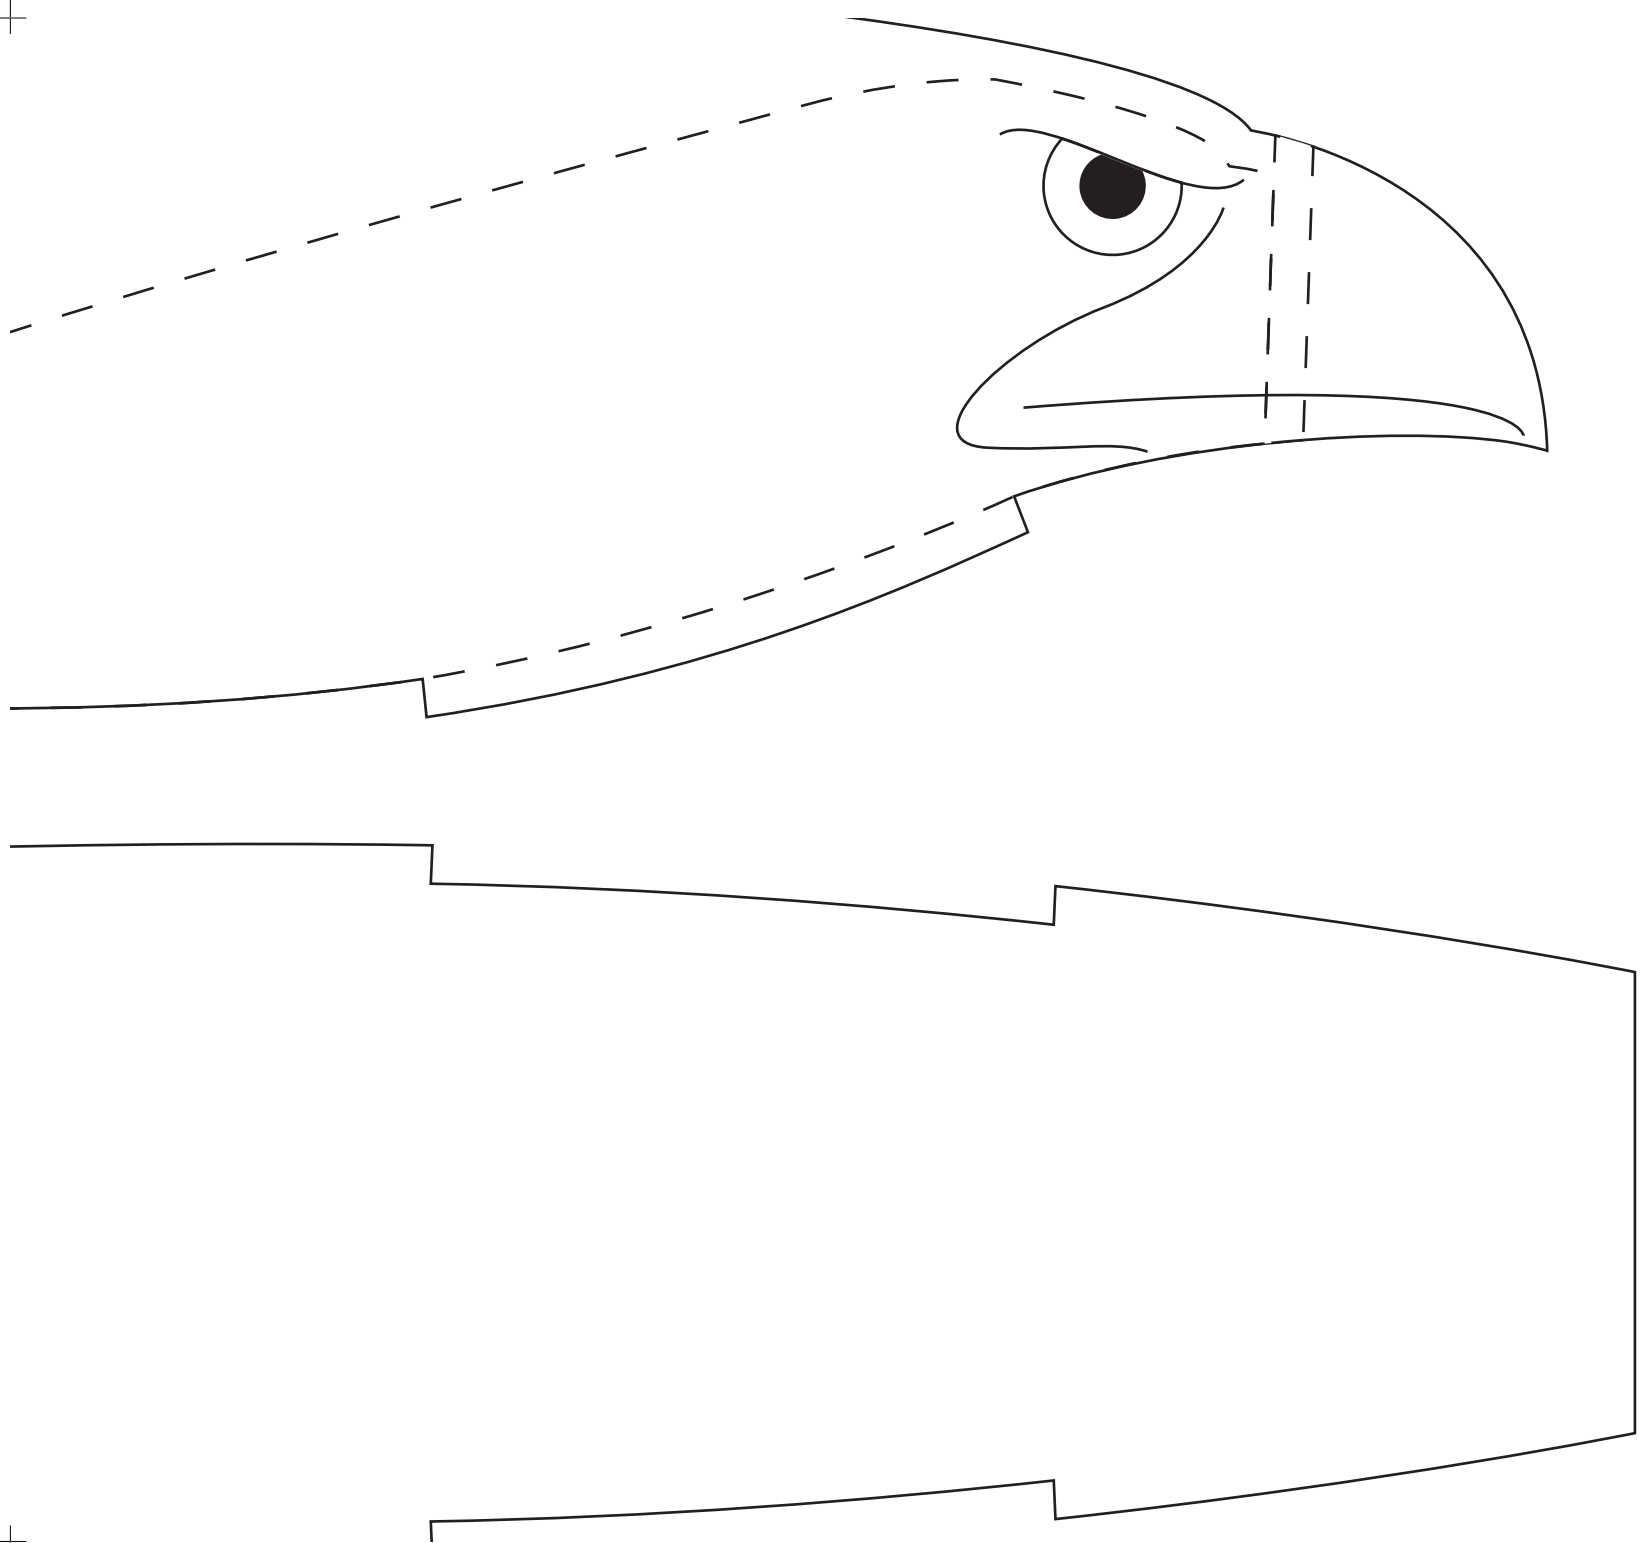


ply reinforcement


4 degrees dihedral

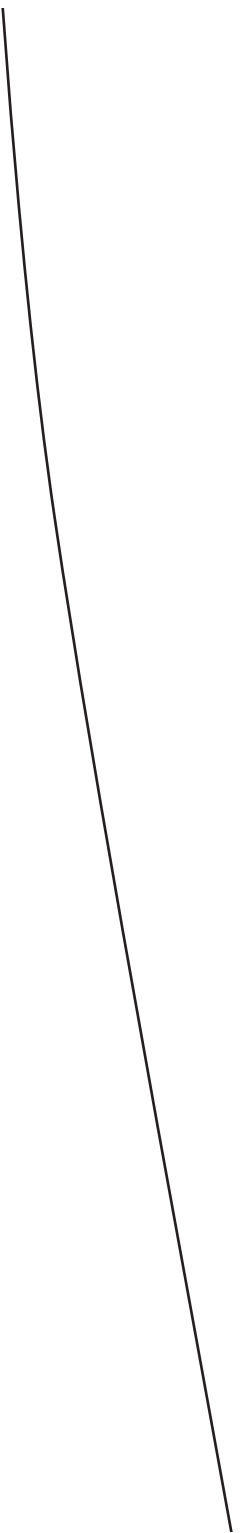


(about 1.5" each wing)

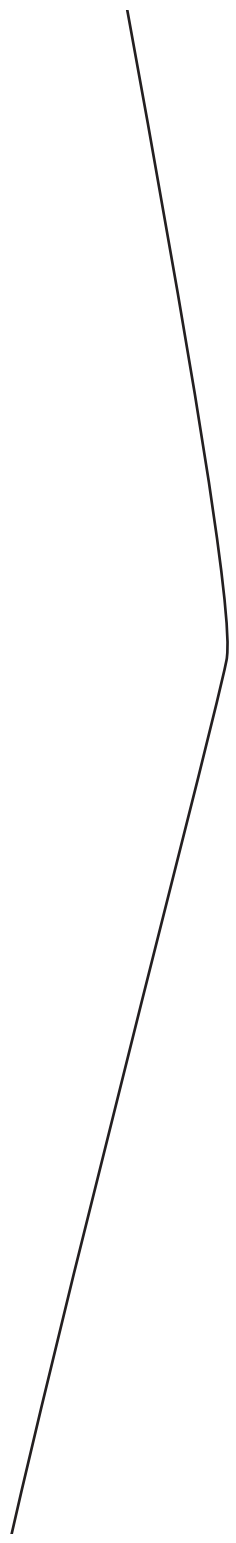


SCORE AND FOLD

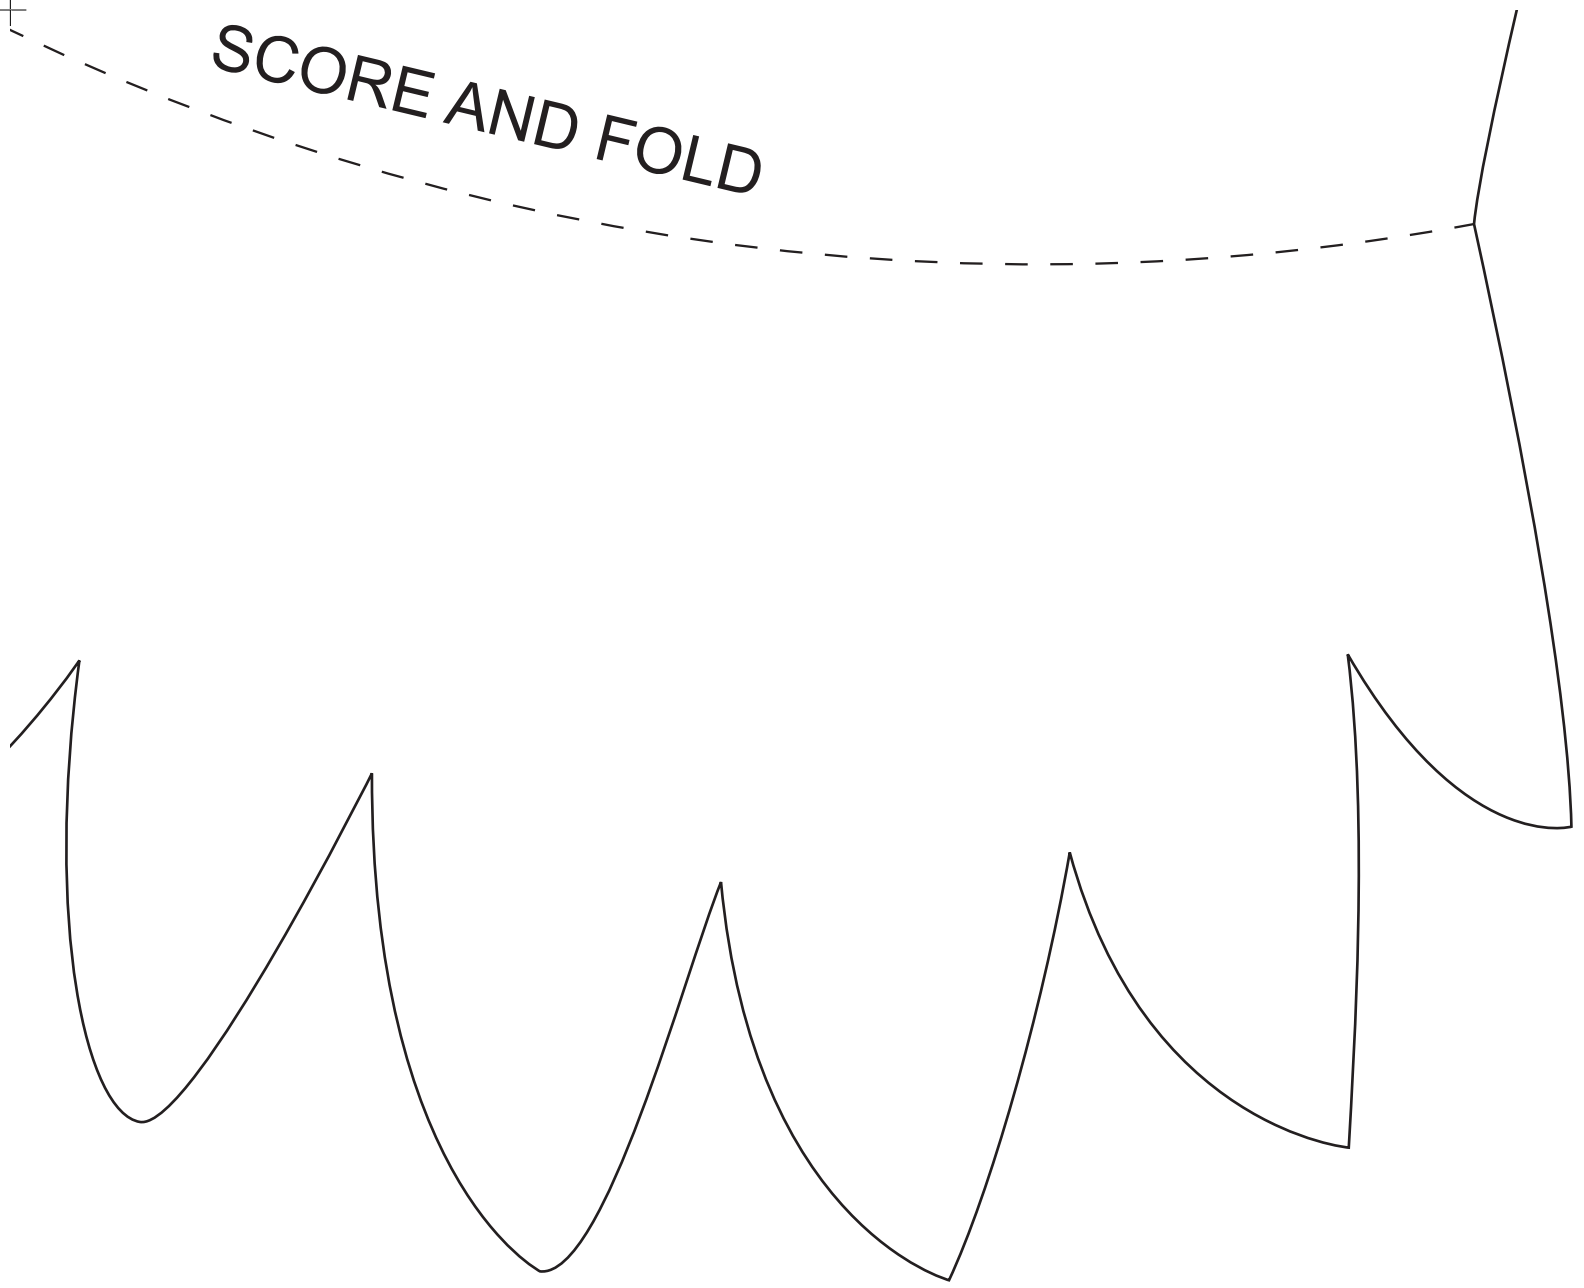


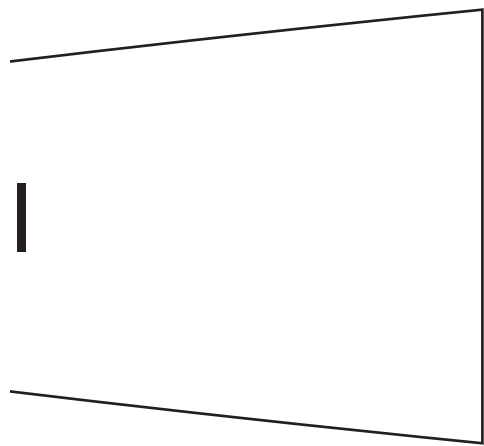

I

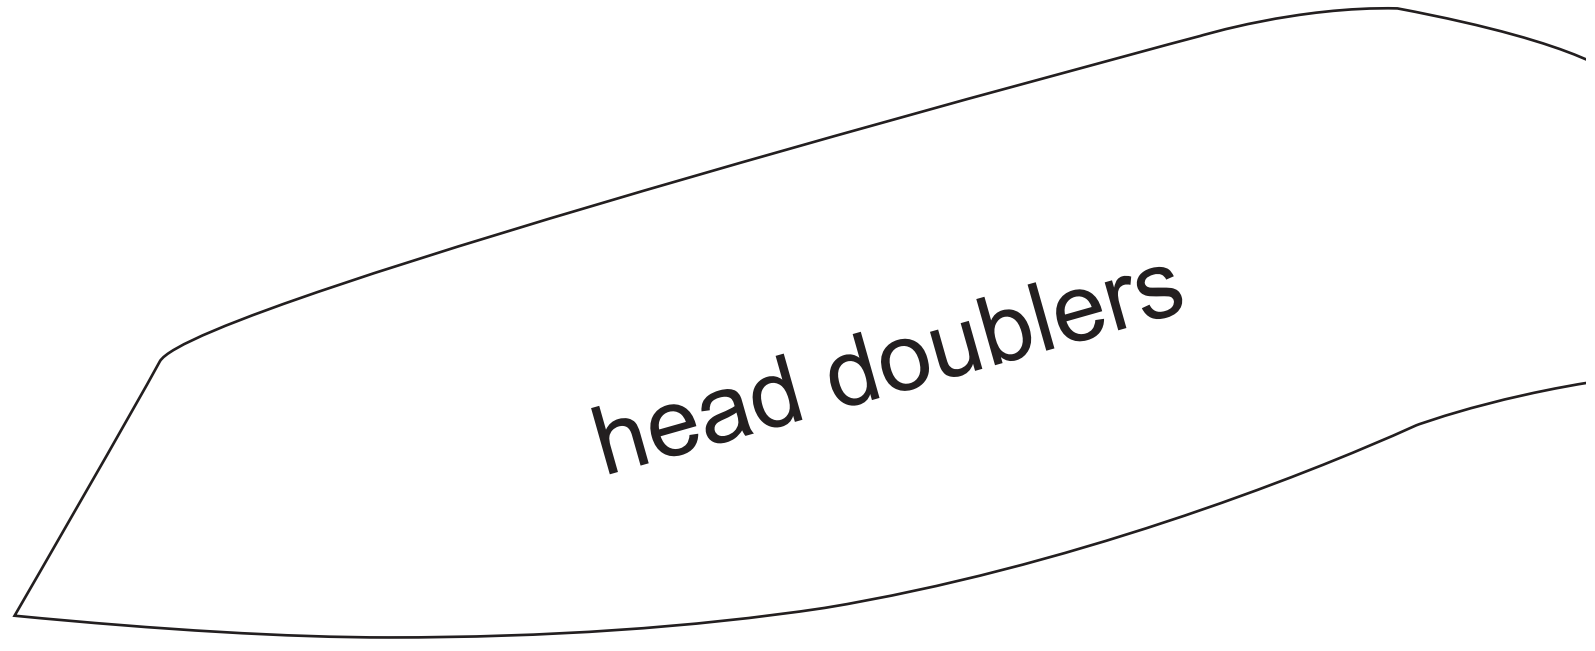


head doublers


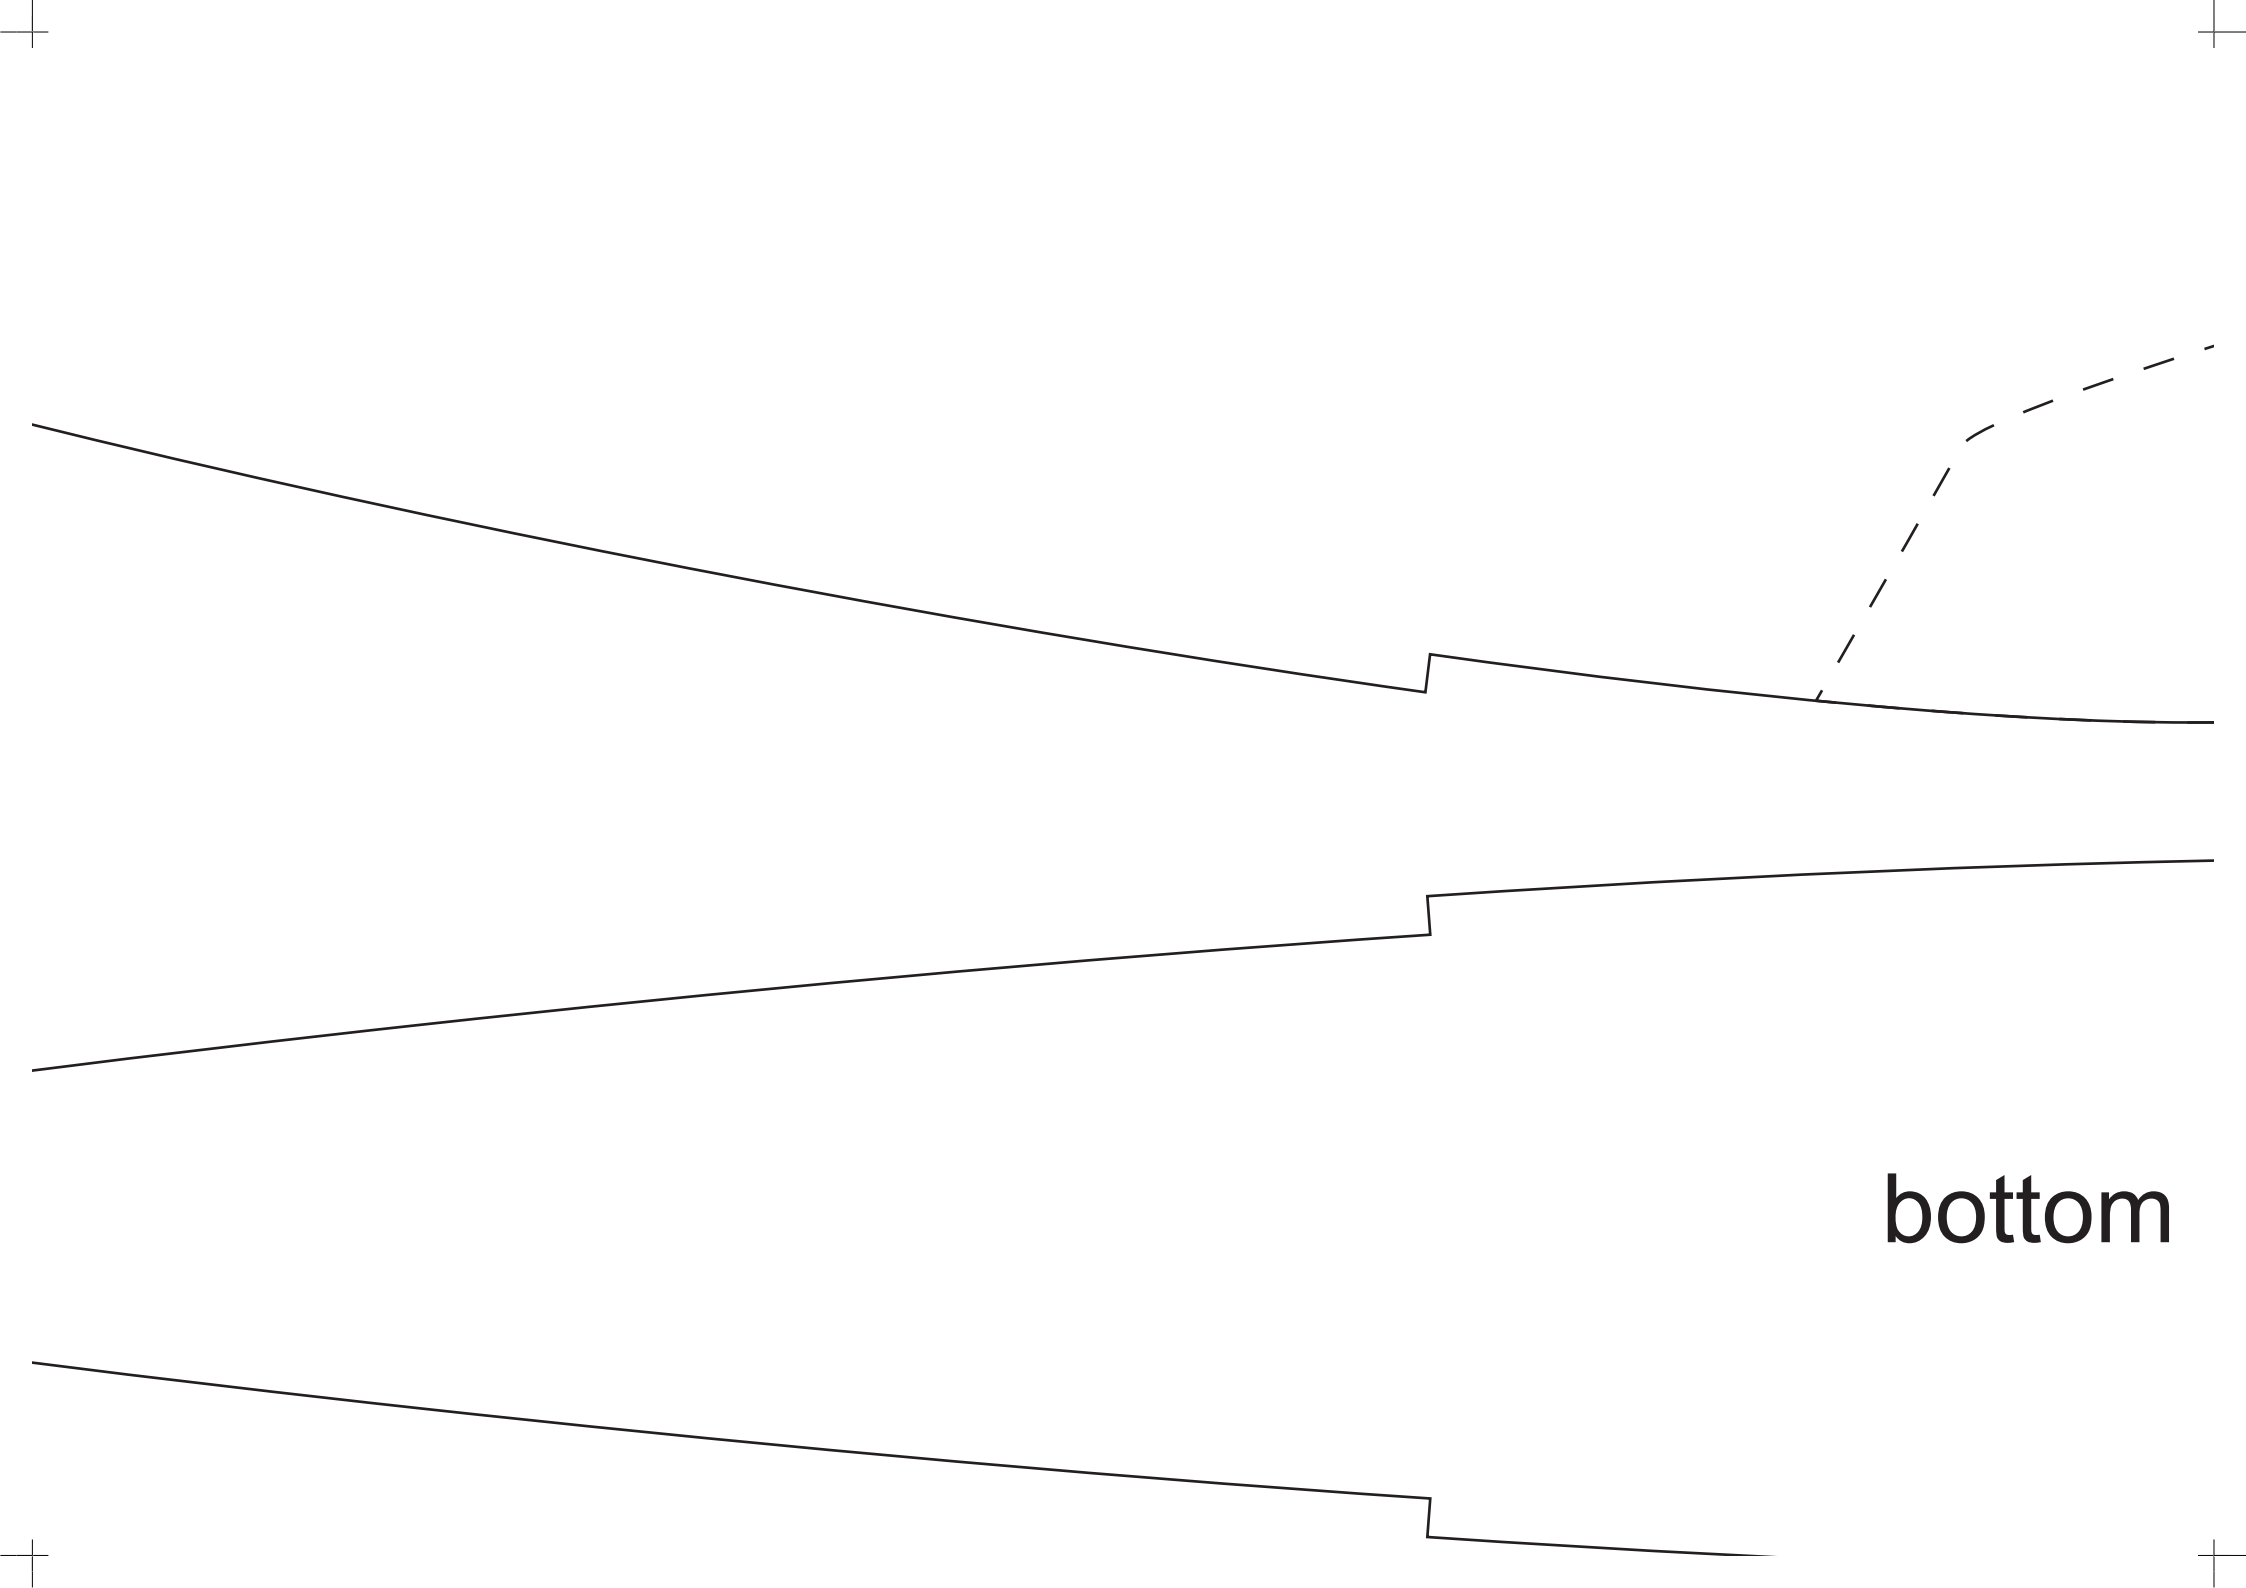


bottom


ply reinforcement

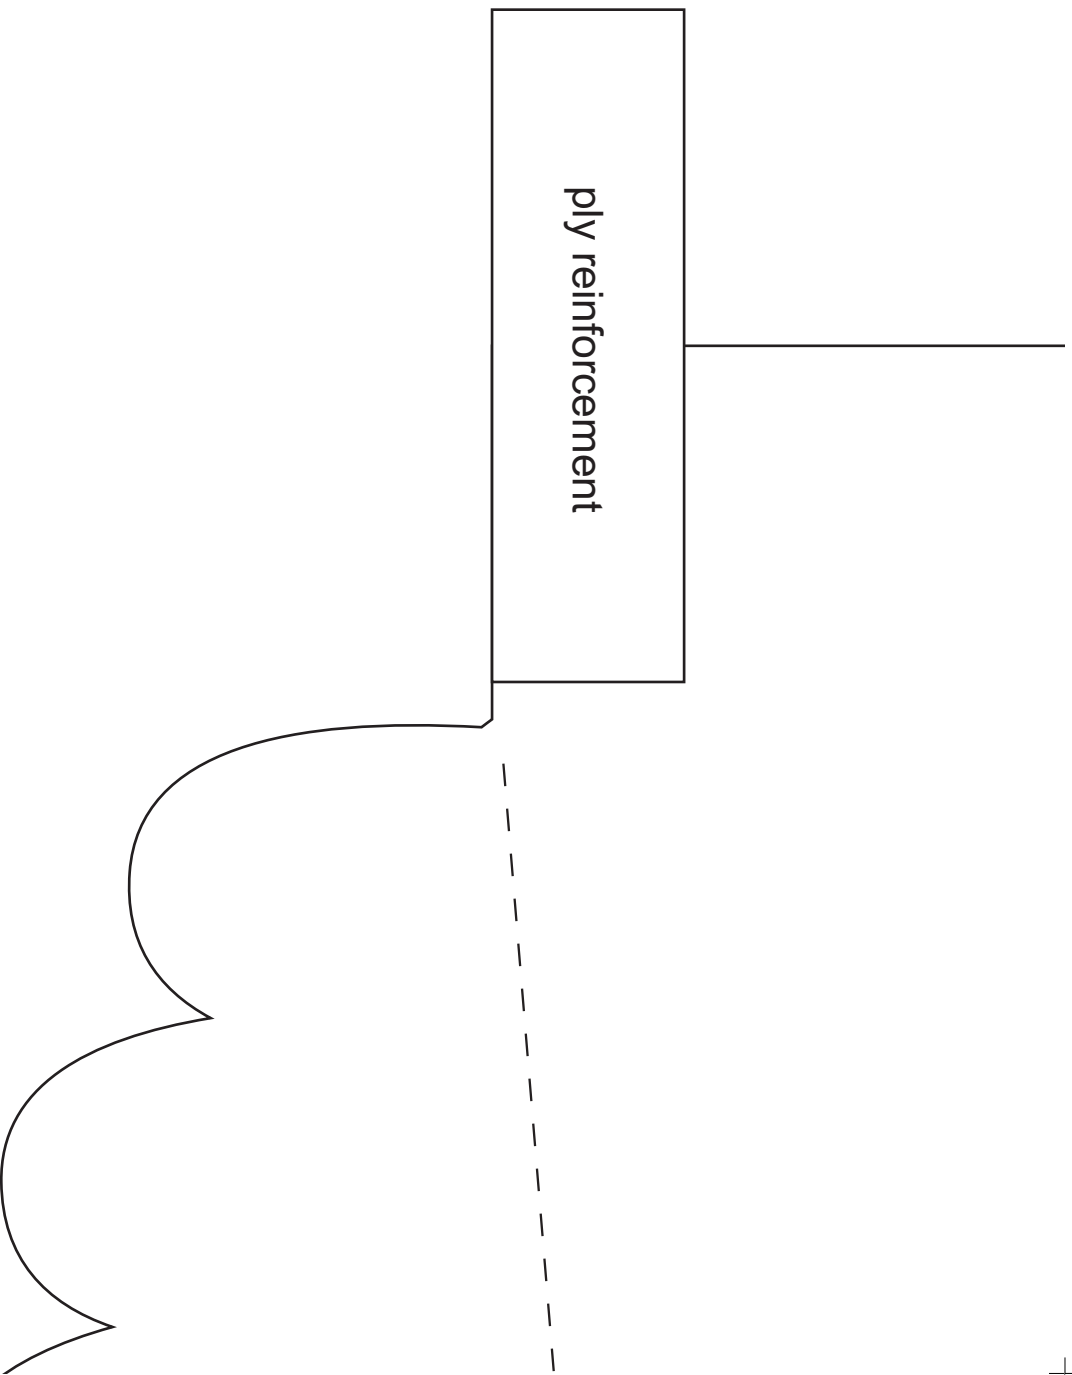





100-110 degrees

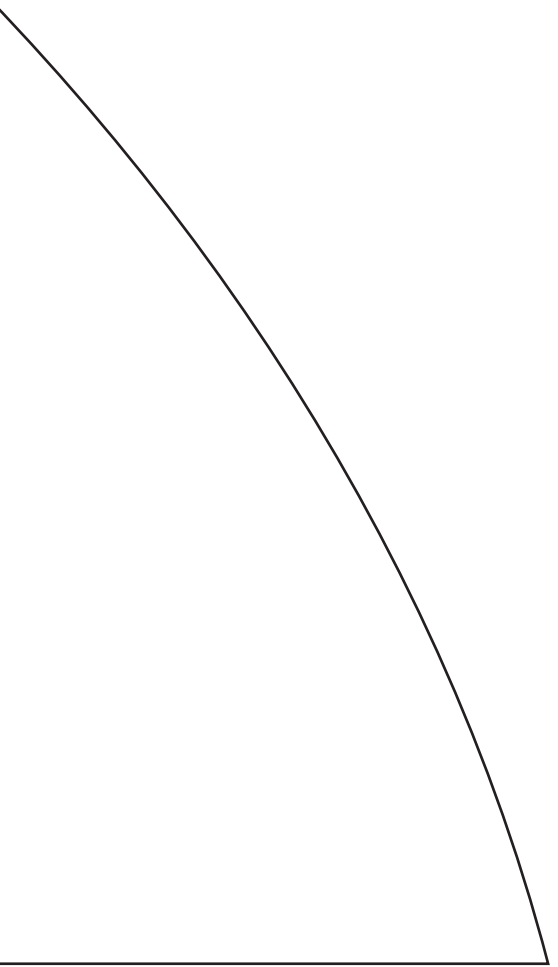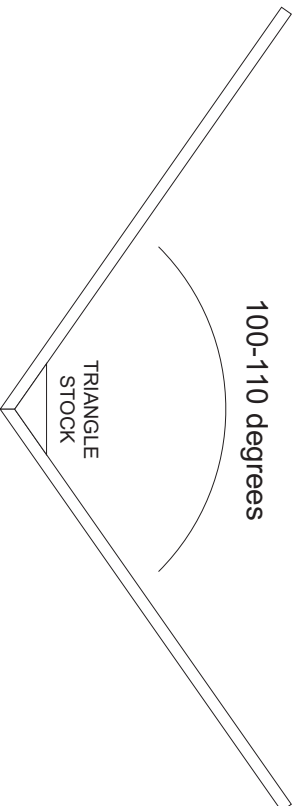


optional ailerons


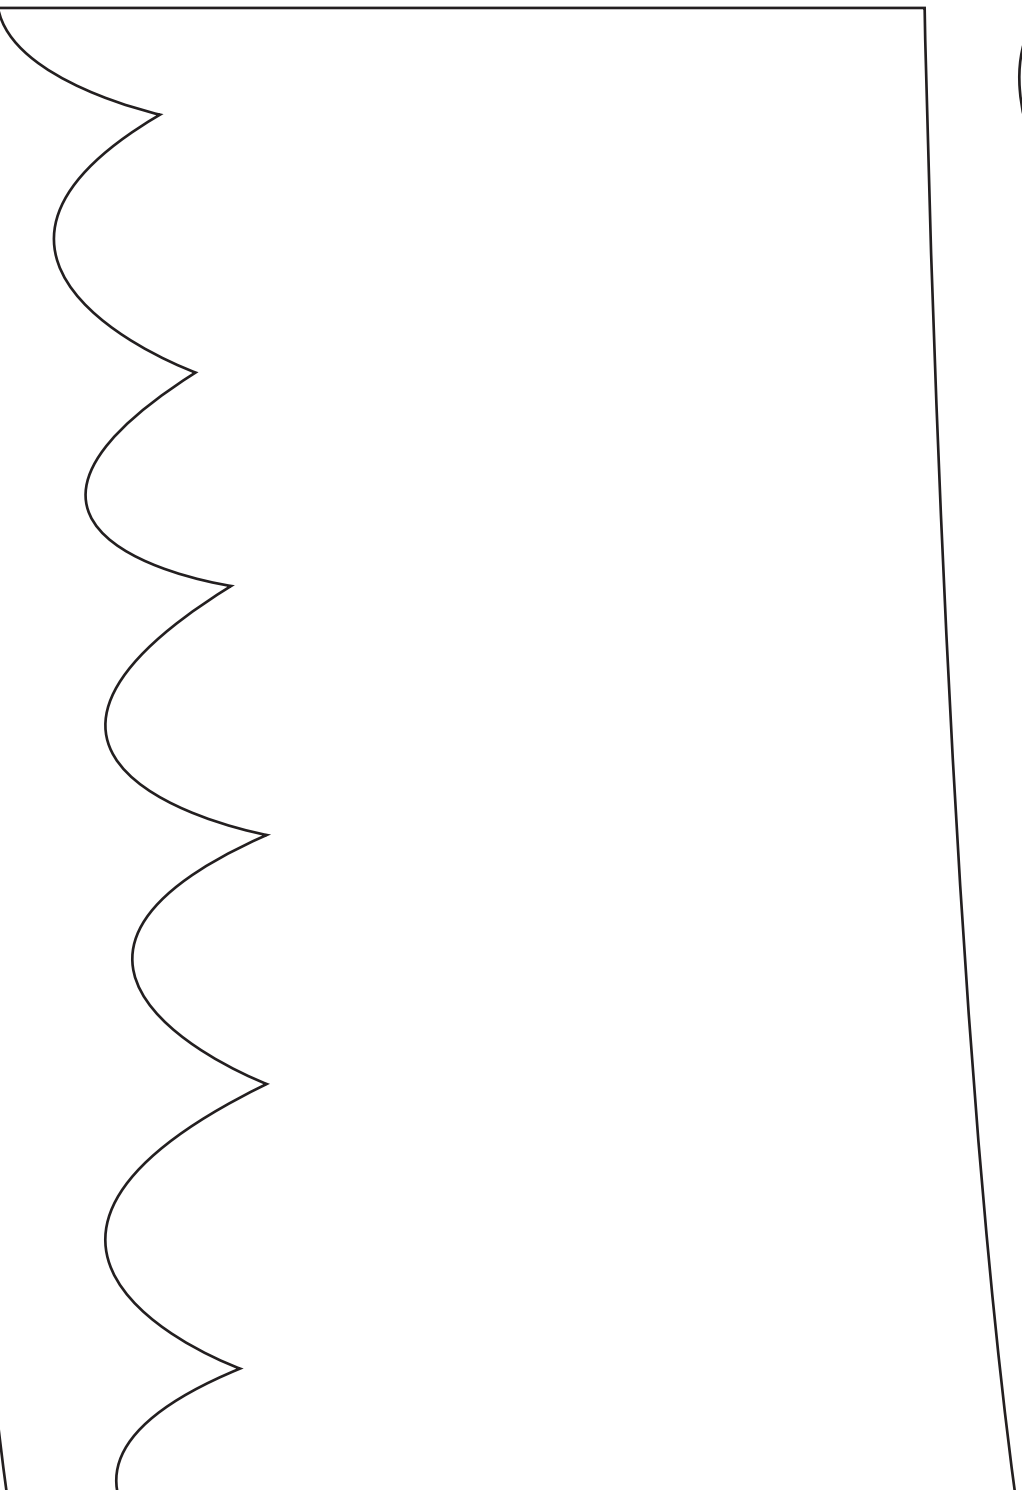


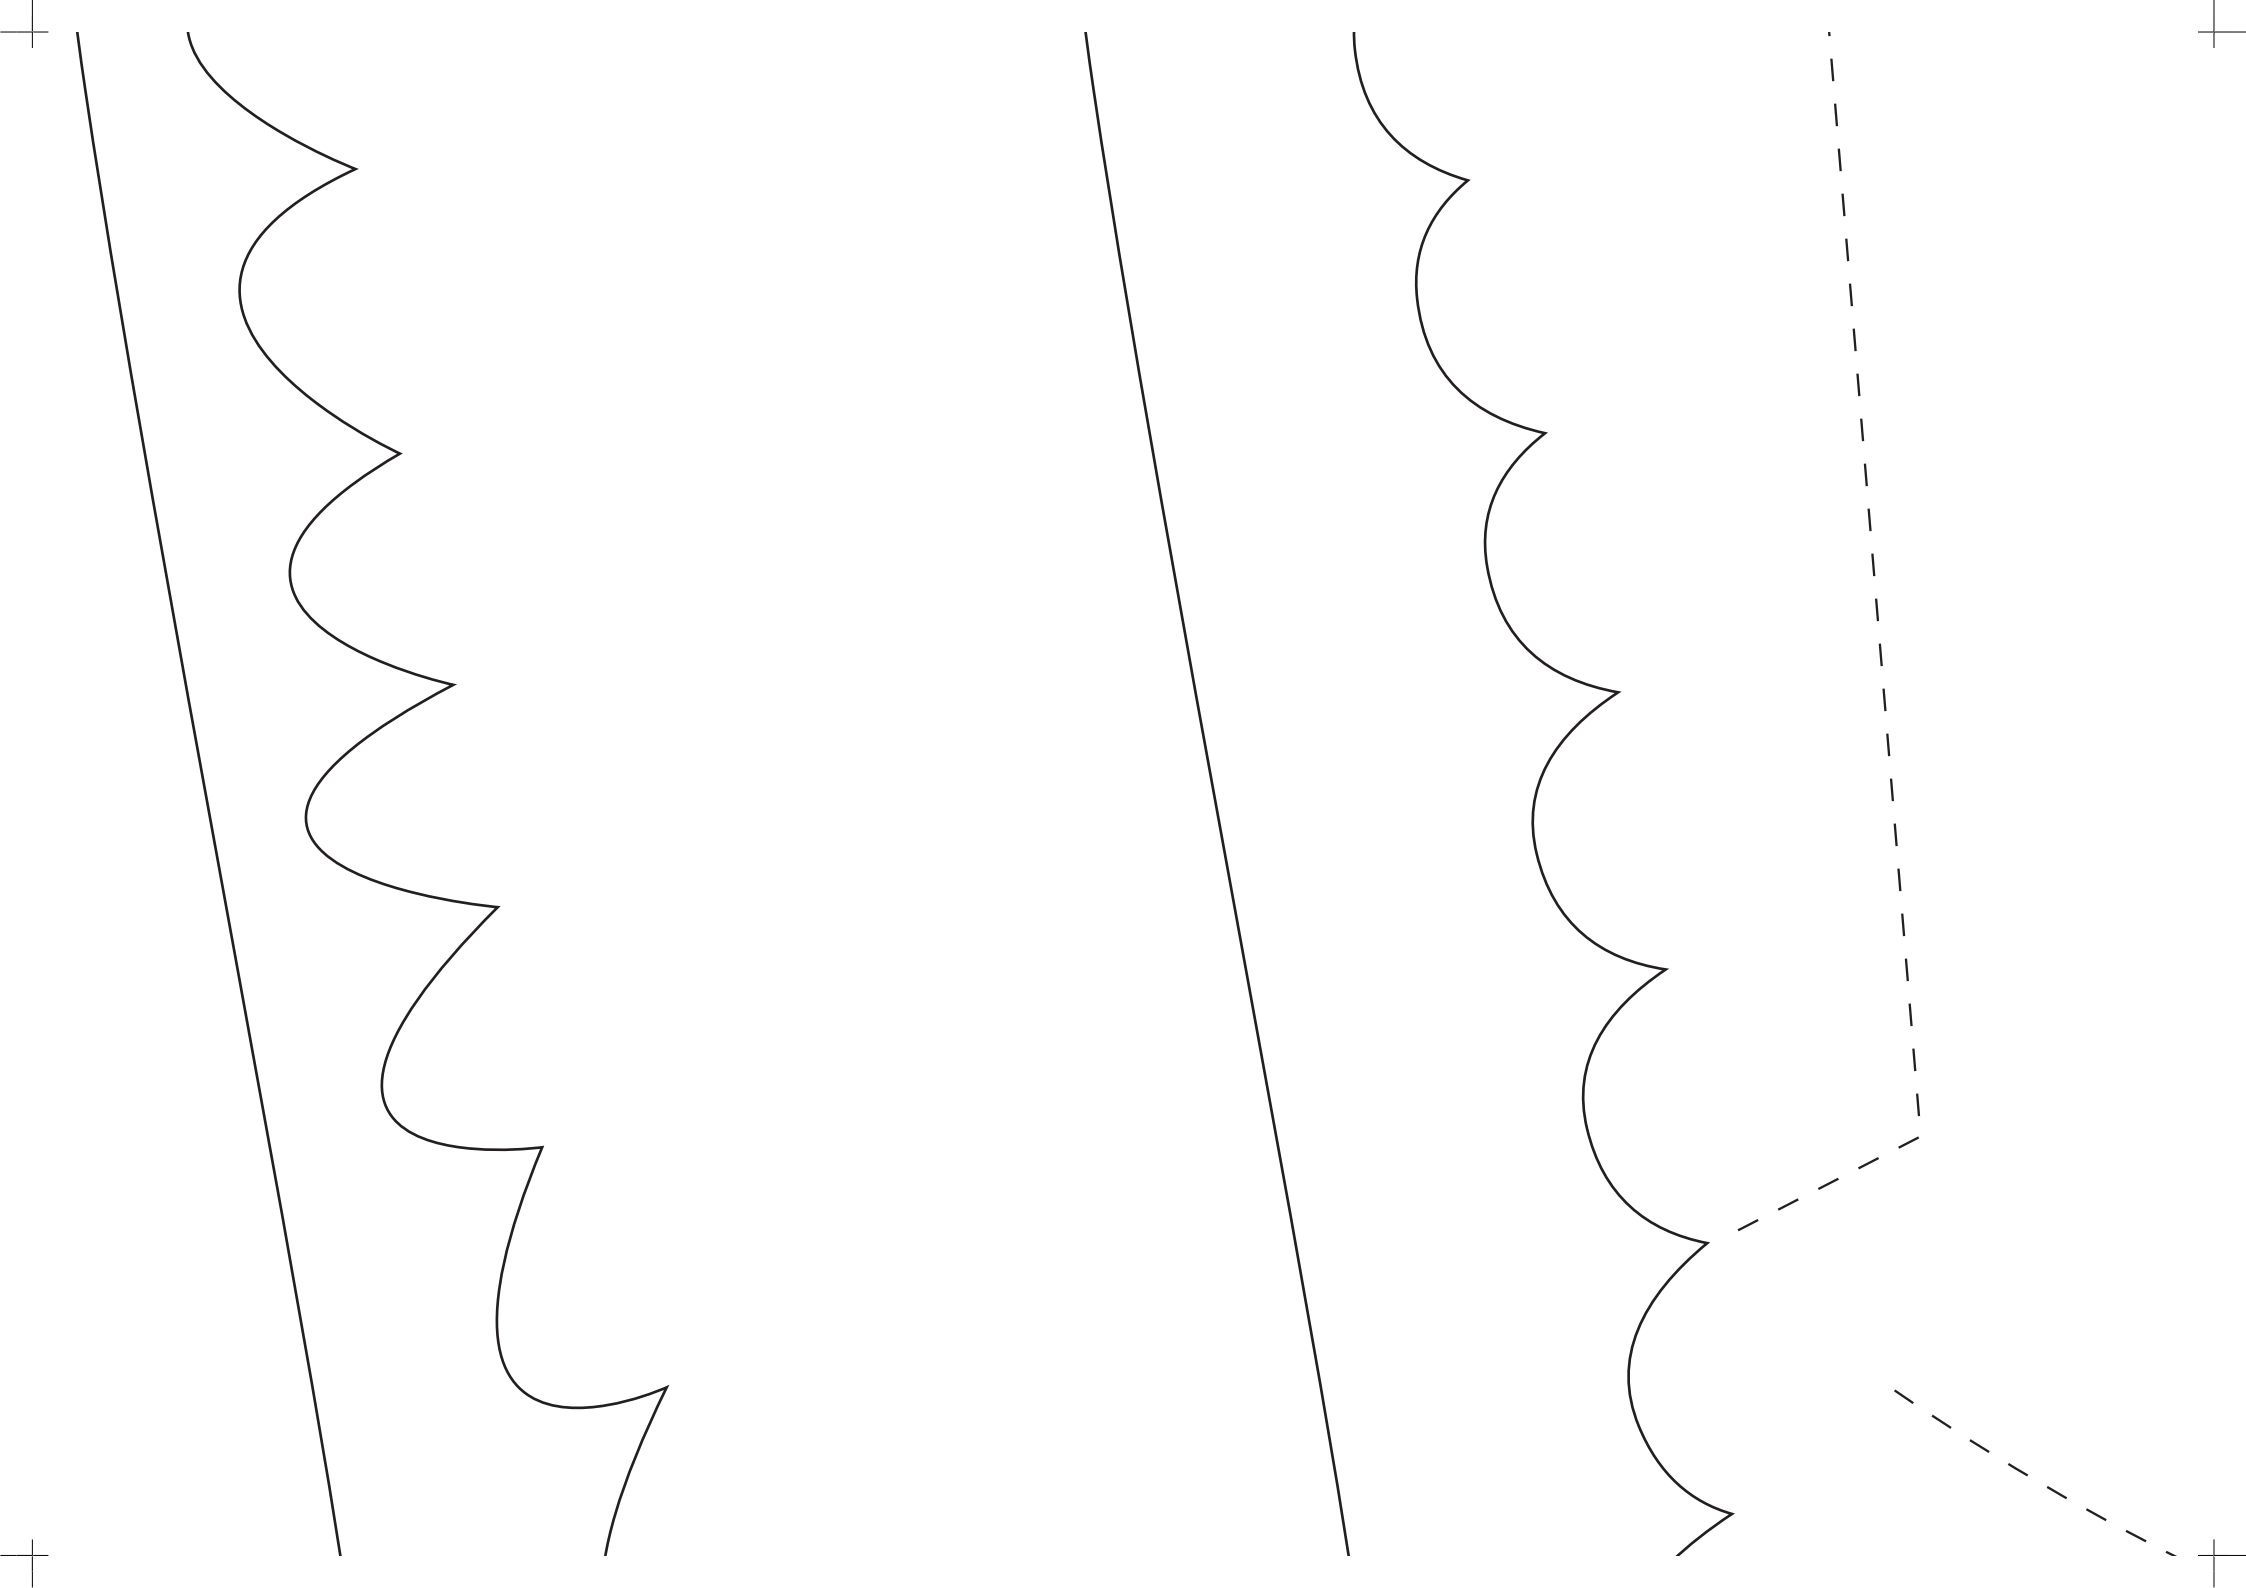

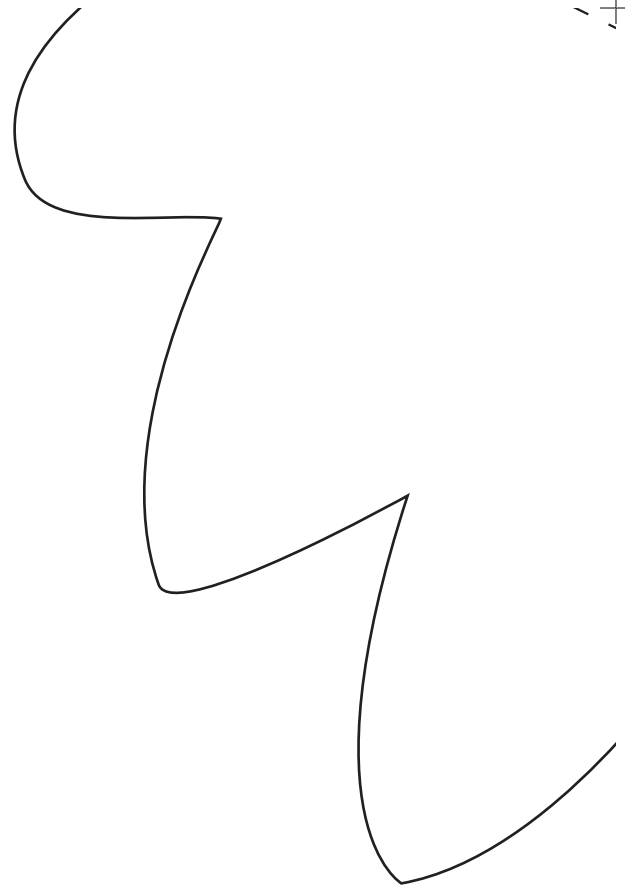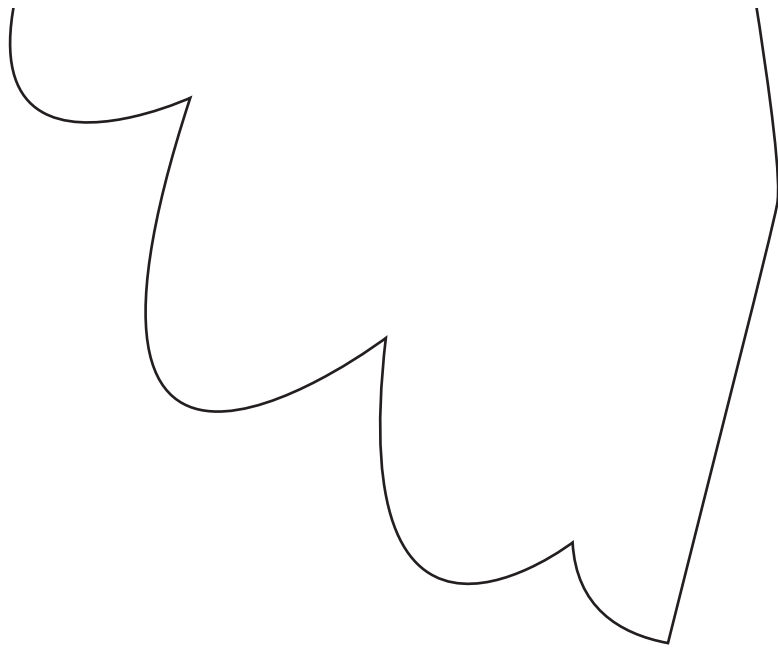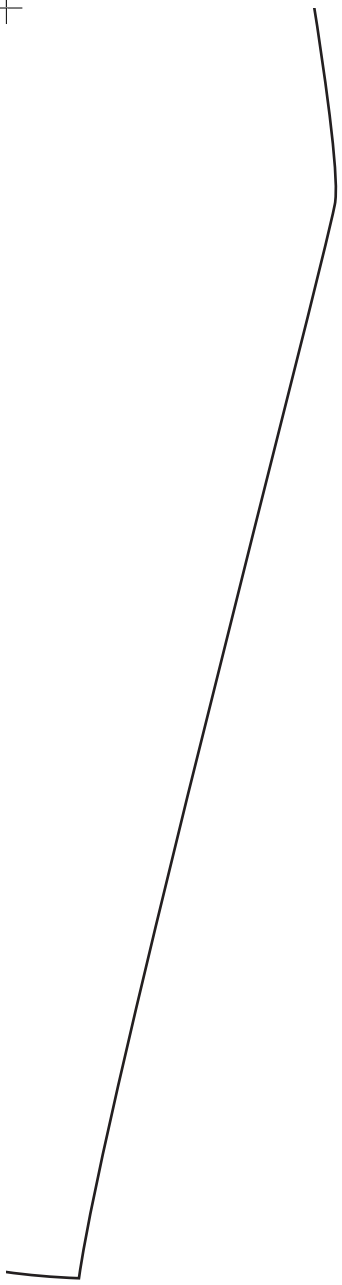

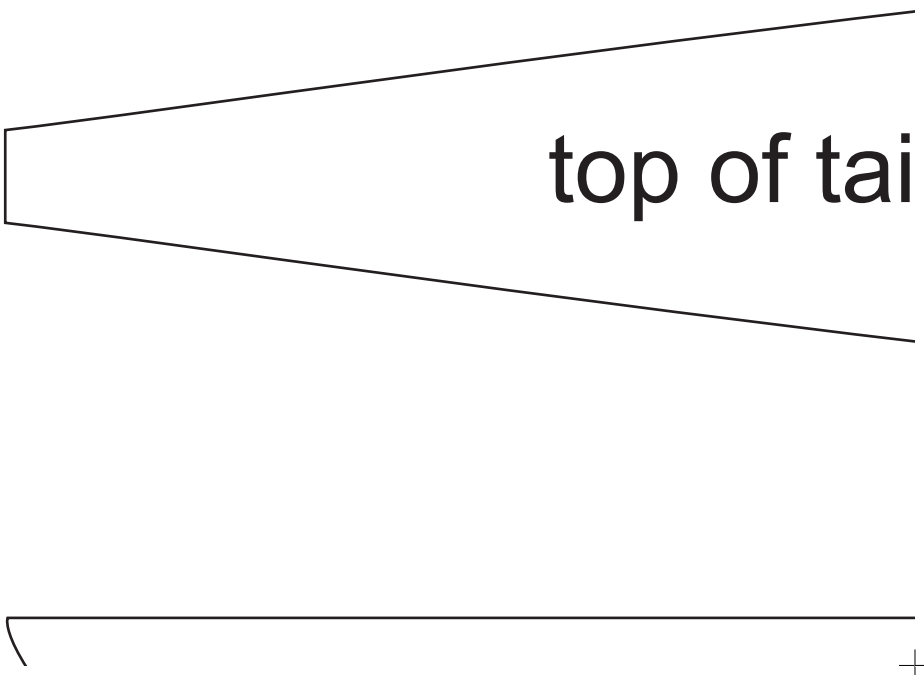


FFF Eagle
56" Wings
5mm (.2")

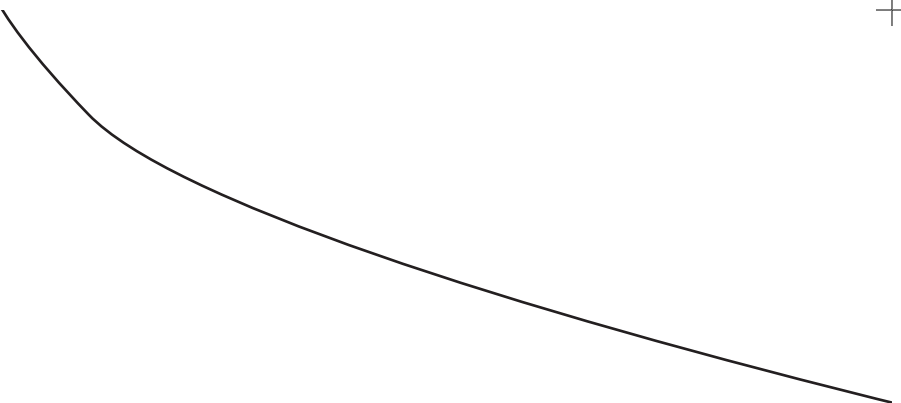
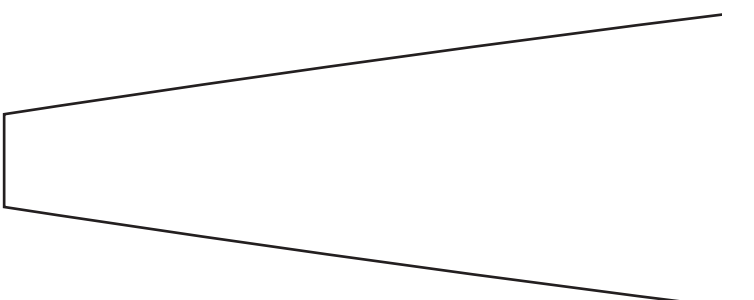



;

pan

thickness

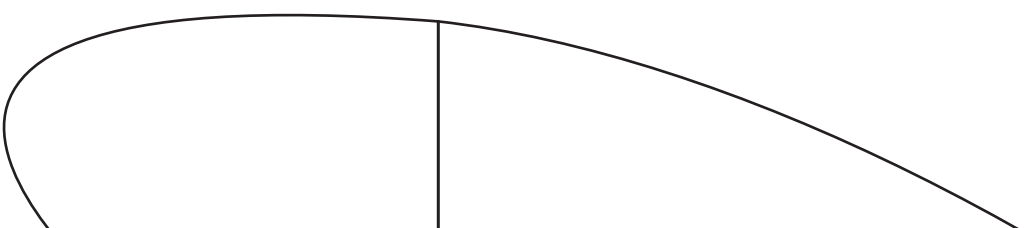

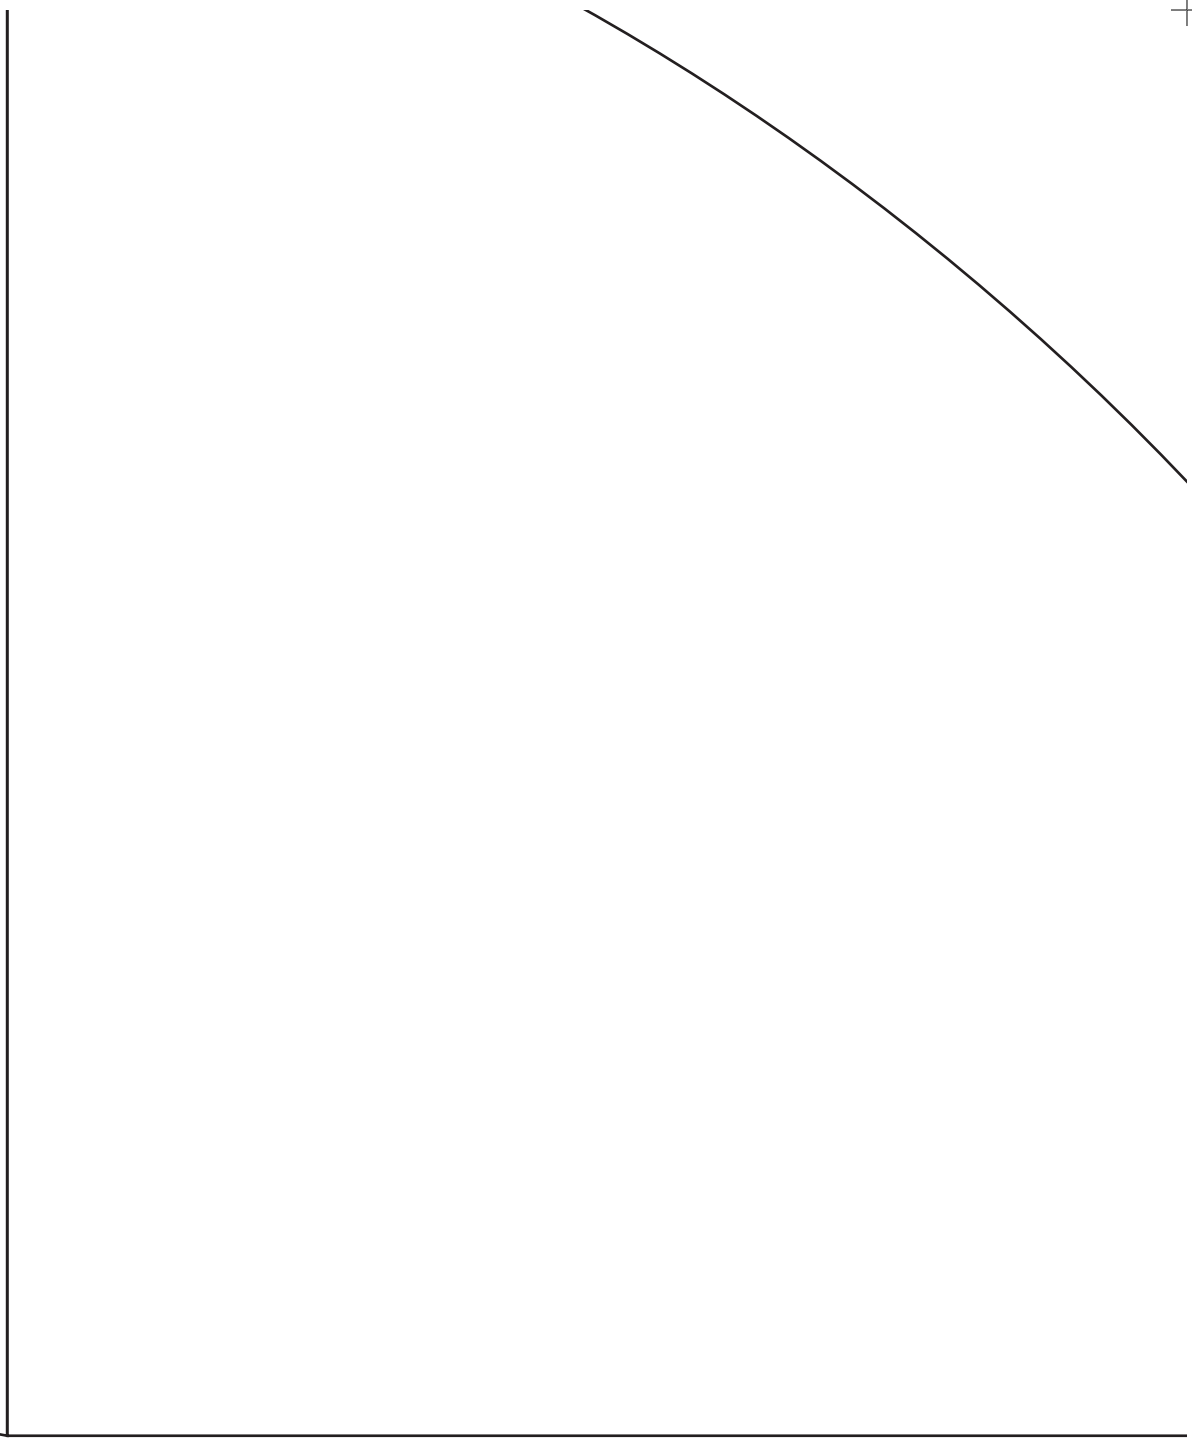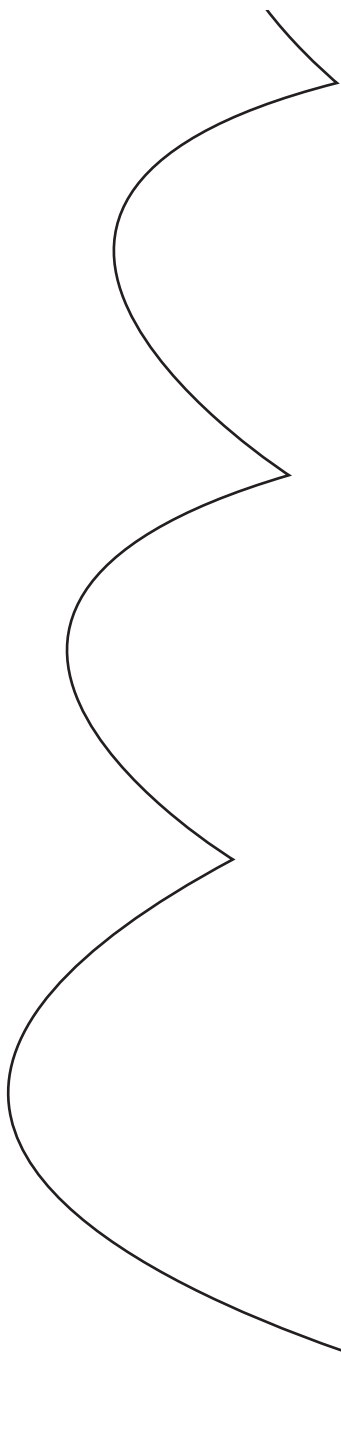

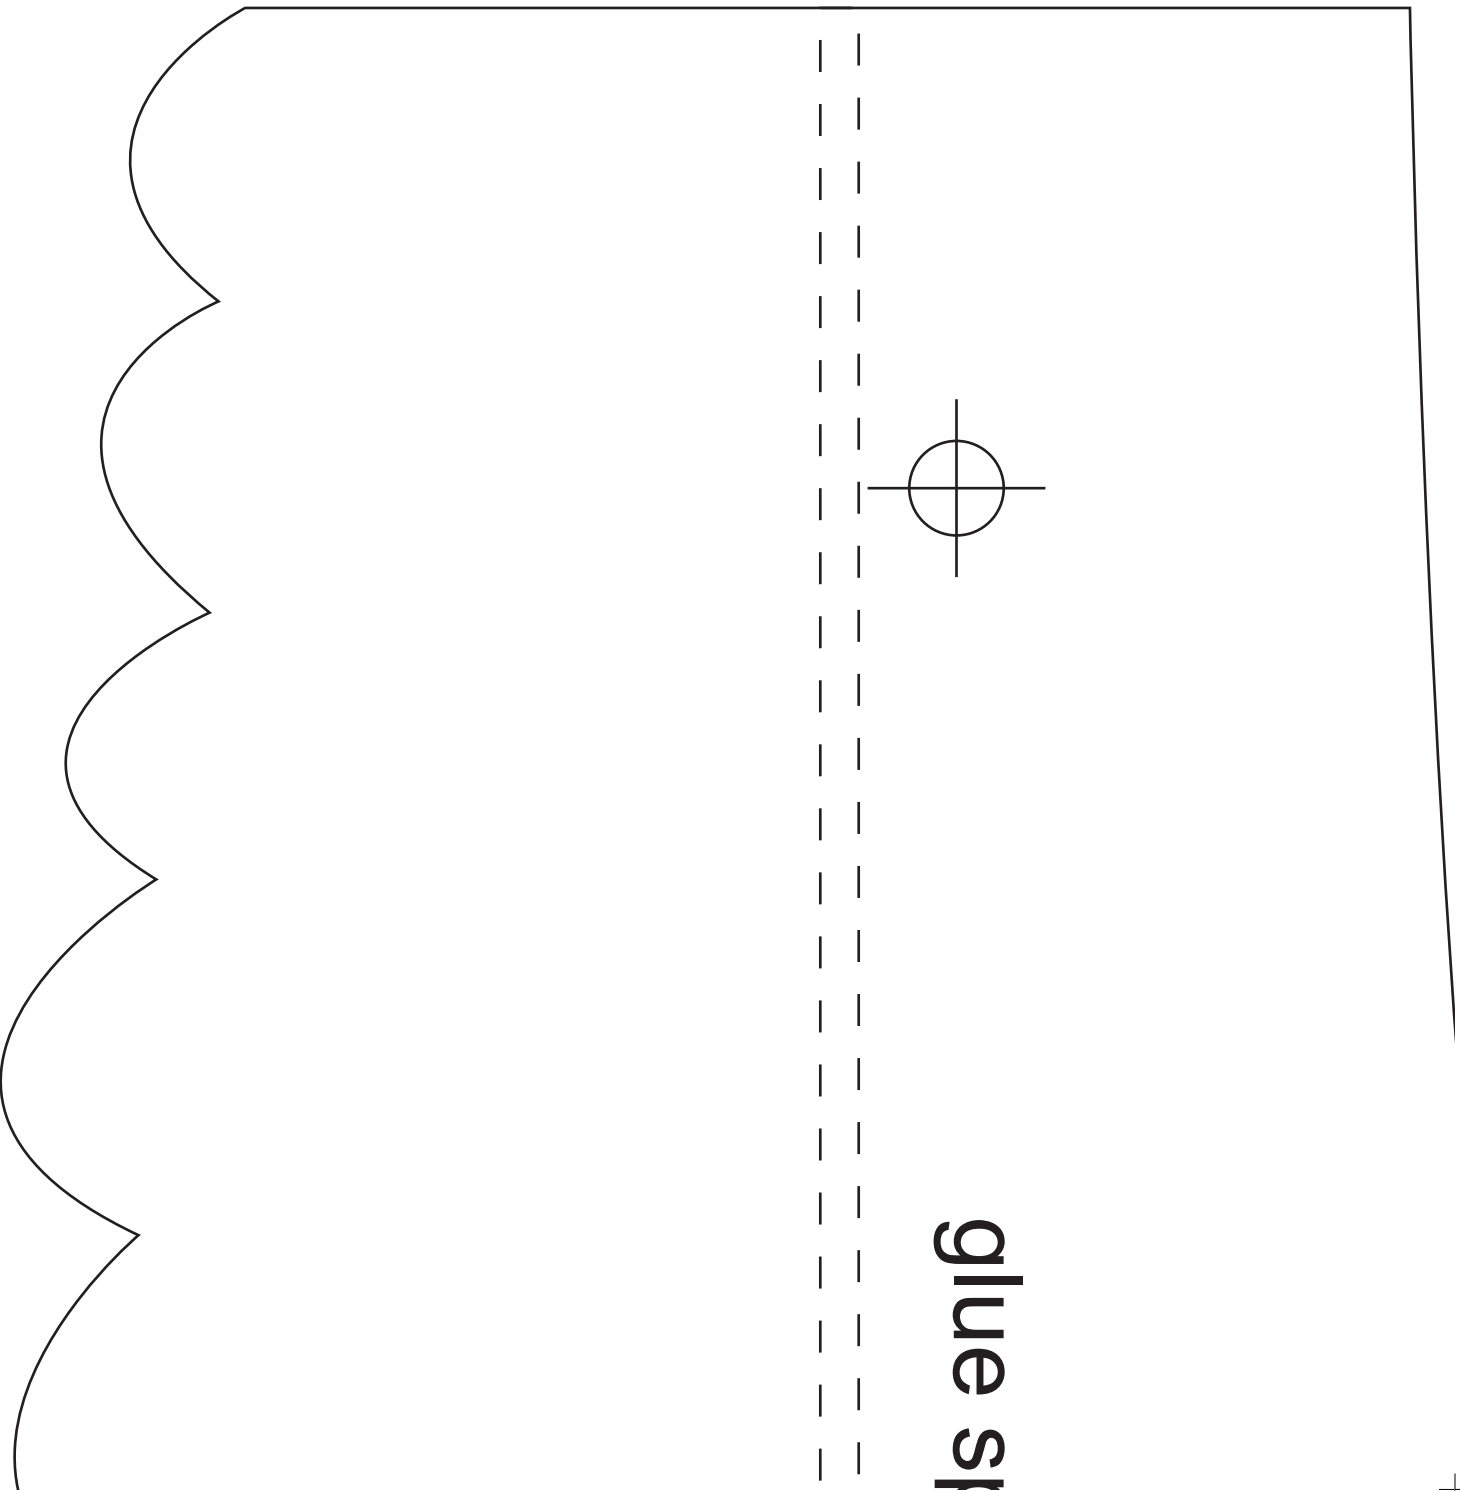

glue st

car to bottom of layer 2

