


Settaggio avvio inverter tensione minima 48V

Per Salvaguardare il pacco serie batteria 4 elementi 12V 100Ah

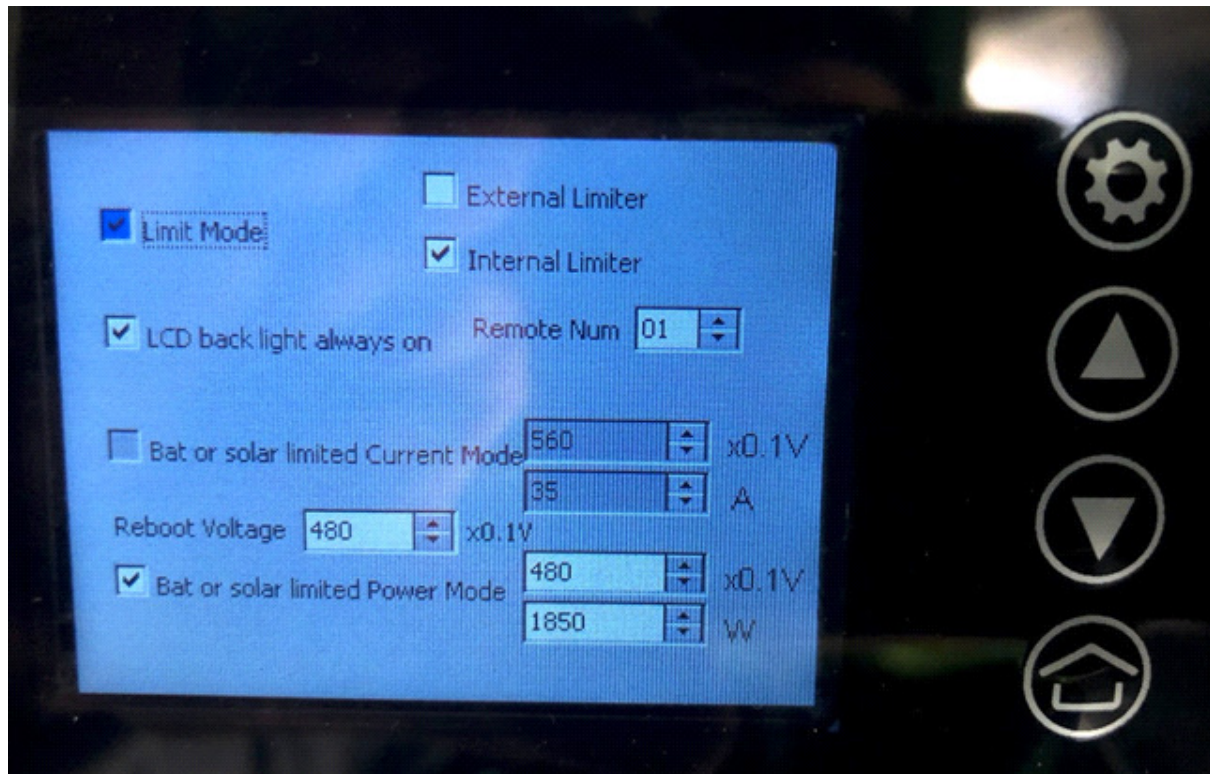

Settaggi Regolatore di Carica

Batt Type

SEALED

Batt AH

100 AH

Temp Coefficient

-3mV/°C / 2V

Rated Volt

48V

Over Volt. Disc.

60.0 V

Charge Limit

59.0 V

Over Volt. Rect

59.0 V

Equalize Charge

58.0 V

Boost Charge

57.6 V

Float Charge

54.5 V

Boost Rect Vol

52.8 V

Low Volt Rect

52.0 V

Under Volt Rect

52.0 V

Under Volt Warn

48.0 V

Low Volt Disc

48.0 V

Discharge Limit

47.5 V

Equalize Time

120 min

Boost Time

120 min

Batt. Manag.

Char.SOC: ———%

Disc.SOC: ———%

Vol.Com. SOC

Verificare uscita nuovo FW

